



BRADNAM'S

DOUBLE HUNG WINDOWS

PRODUCT INFORMATION

Product performance is subject to regional variations, design requirements and building codes. Performance parameters are independent of each other.

Images are for illustration purposes only and may not accurately represent the product. Bradnam's Windows & Doors reserves the right to change, alter or delete any aspect of this product without notice.



PERFORMANCE PARAMETERS

CONFIGURATIONS

STANDARD SIZES

COLONIAL BAR OPTIONS

REVEAL SETBACKS

SILL REBATES

PERFORMANCE PARAMETERS

| | Essential | Signature CB |
|---|------------|--------------|
| Frame size | 52mm | 100mm |
| Maximum window height | 2100mm | 2450mm |
| Maximum window width | 3010mm | 3690mm |
| Maximum panel width | 900mm | 1230mm |
| Maximum panel weight | 22kg | 42kg |
| Maximum water rating | 450Pa | 600Pa |
| Maximum wind rating | 4500Pa ULS | 6000Pa ULS |
| Maximum glass thickness (single glazed) | 6.38mm | 12.76mm |
| Maximum glass thickness (double glazed) | N/A | 20mm |
| Maximum acoustic rating | Rw32 | Rw35 |
| Maximum bushfire rating | BAL 40 | BAL 40 |
| Lowest U-value (single glazed) | 4.3 | 4.8 |
| Lowest U-value (double glazed) | N/A | 3.4 |


Note: To ensure optimal performance, window openings may be restricted based on size and configurations. Performance figures are independent of each other and subject to conditions. Contact a Bradnam's Windows & Doors representative to discuss your specific project requirements.

CONFIGURATIONS

Standard



D DD DF DDD DFD

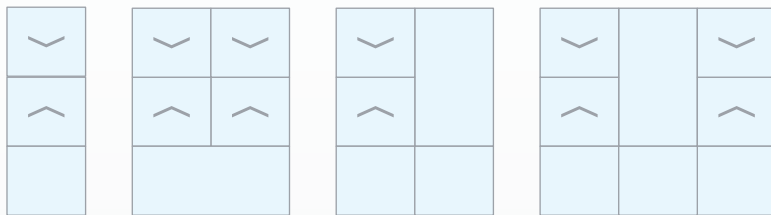

D/F DD/F DF/FF DFD/FFF

Designer






















































DDF DFF DDDD DFFD

Other Designer configurations available

STANDARD SIZES – QUEENSLAND

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam’s representative to confirm availability. Double Hung Windows may be subject to local variation or regulatory requirements.











































































































⊕ Available Single or Double Glazed (Signature version only)

| STUD OPENING mm | | 660 | 960 | 1260 | 1560 | 1860 | 2160 | 2460 | 2760 | 3060 |
|-----------------|------|--|--|---|---|---|--|--|--|--|
| FRAME SIZE mm | | 610 | 910 | 1210 | 1510 | 1810 | 2110 | 2410 | 2710 | 3010 |
| 950 | 900 |  D0906 |  D0909 |  D0912 |  DD0915 |  DD0918 |  DDD0921 |  DDD0924 |  DDD0927 |  DDD0930 |
| | 1050 |  D1006 |  D1009 |  D1012 |  DD1015 |  DD1018 |  DDD1021 |  DDD1024 |  DDD1027 |  DDD1030 |
| 1250 | 1200 |  D1206 |  D1209 |  D1212 |  DD1215 |  DD1218 |  DDD1221 |  DDD1224 |  DDD1227 |  DDD1230 |
| | 1550 |  D1506 |  D1509 |  DD1512 |  DD1515 |  DD1518 |  DDD1521 |  DDD1524 |  DDD1527 |  DDD1530 |
| 1850 | 1800 |  D1806 |  D1809 |  DD1812 |  DD1815 |  DD1818 |  DDD1821 |  DDD1824 |  DDD1827 | |
| | 2150 |  D2106 |  D2109 |  DD2112 |  DD2115 |  DD2118 |  DDD2121 |  DDD2124 |  DDD2127 | |

STANDARD SIZES – NEW SOUTH WALES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam's representative to confirm availability. Double Hung Windows may be subject to local variation or regulatory requirements.

⊕ Available Single or Double Glazed (Signature version only)

| STUD OPENING mm | | 670 | 910 | 1270 | 1630 | 1870 | 2230 | 2470 | 2710 | 3070 |
|-----------------|------|--|--|--|--|--|--|--|---|--|
| FRAME SIZE mm | | 610 | 850 | 1210 | 1570 | 1810 | 2170 | 2410 | 2650 | 3010 |
| 920 | 860 |  D0906 |  D0909 |  D0912 |  DY0916 |  DY0918 |  DYD0922 |  DYD0924 |  DYD0927 |  DYD0930 |
| | 1090 |  D1006 |  D1009 |  D1012 |  DY1016 |  DY1018 |  DYD1022 |  DYD1024 |  DYD1027 |  DYD1030 |
| 1260 | 1200 |  D1206 |  D1209 |  D1212 |  DY1216 |  DY1218 |  DYD1222 |  DYD1224 |  DYD1227 |  DYD1230 |
| | 1430 |  D1406 |  D1409 |  D1412 |  DY1416 |  DY1418 |  DYD1422 |  DYD1424 |  DYD1427 |  DYD1430 |
| 1520 | 1460 |  D1506 |  D1509 |  D1512 |  DY1516 |  DY1518 |  DYD1522 |  DYD1524 |  DYD1527 |  DYD1530 |
| | 1860 |  D1806 |  D1809 |  DY1812 |  DY1816 |  DY1818 |  DYD1822 |  DYD1824 |  DYD1827 | |
| 1860 | 1800 |  D/O1806 |  D/O1809 |  D/O1812 |  DY/OO1816 |  DY/OO1818 |  DYD/OOO1822 |  DYD/OOO1824 |  DYD/OOO1827 |  DYD/OOO1830 |
| | 600 |  D/O1806 |  D/O1809 |  D/O1812 |  DY/OO1816 |  DY/OO1818 |  DYD/OOO1822 |  DYD/OOO1824 |  DYD/OOO1827 |  DYD/OOO1830 |
| 2120 | 2060 |  D2106 |  D2109 |  DY2112 |  DY2116 |  DY2118 |  DYD2122 |  DYD2124 |  DYD2127 | |
| 2120 | 2060 |  D/O2106 |  D/O2109 |  D/O2112 |  DY/OO2116 |  DY/OO2118 |  DYD/OOO2122 |  DYD/OOO2124 |  DYD/OOO2127 |  DYD/OOO2130 |
| | 1460 |  D/O2106 |  D/O2109 |  D/O2112 |  DY/OO2116 |  DY/OO2118 |  DYD/OOO2122 |  DYD/OOO2124 |  DYD/OOO2127 |  DYD/OOO2130 |
| | 600 |  D/O2106 |  D/O2109 |  D/O2112 |  DY/OO2116 |  DY/OO2118 |  DYD/OOO2122 |  DYD/OOO2124 |  DYD/OOO2127 |  DYD/OOO2130 |


STANDARD SIZES – VICTORIA

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Bradnam’s representative to confirm availability. Double Hung Windows may be subject to local variation or regulatory requirements.


| STUD OPENING mm | | 670 | 910 | 1270 | 1510 | 1870 | 2230 | 2470 | 2710 | 3070 |
|-----------------|------|-------|-------|--------|--------|--------|---------|---------|---------|---------|
| FRAME SIZE mm | | 610 | 850 | 1210 | 1450 | 1810 | 2170 | 2410 | 2650 | 3010 |
| 920 | 860 | | | | | | | | | |
| | | D0906 | D0909 | D0912 | DF0915 | DF0918 | DFD0921 | DFD0924 | DFD0927 | DFD0930 |
| 1090 | 1030 | | | | | | | | | |
| | | D1006 | D1009 | D1012 | DF1015 | DF1018 | DFD1021 | DFD1024 | DFD1027 | DFD1030 |
| 1260 | 1200 | | | | | | | | | |
| | | D1206 | D1209 | D1212 | DF1215 | DF1218 | DFD1221 | DFD1224 | DFD1227 | DFD1230 |
| 1520 | 1460 | | | | | | | | | |
| | | D1406 | D1409 | D1412 | DF1415 | DF1418 | DFD1421 | DFD1424 | DFD1427 | DFD1430 |
| 1860 | 1800 | | | | | | | | | |
| | | D1806 | D1809 | DF1812 | DF1815 | DF1818 | DFD1821 | DFD1824 | DFD1827 | |
| 2120 | 2060 | | | | | | | | | |
| | | D2006 | D2009 | DF2012 | DF2015 | DF2018 | DFD2021 | DFD2024 | DFD2027 | |

COLONIAL BAR OPTIONS


Design Options




DD218
Traditional Colonial




DD218
Australian Colonial



DD218
Highlander




DD218
Traditional Federation



DD218
Australian Federation

Types of Colonial Bar

Scale 5:1

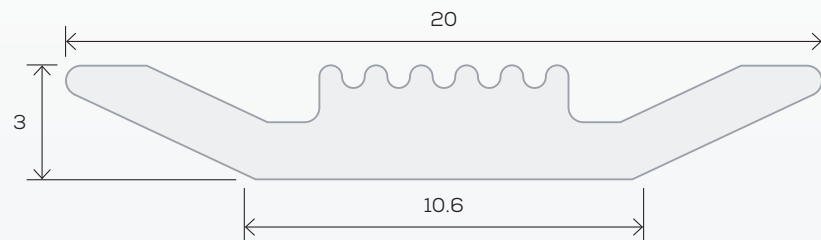


Raised




Flat

REVEAL SETBACKS

Note: Diagrams are not to scale

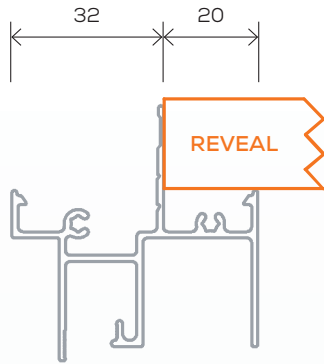

Essential Double Hung Window (52mm)

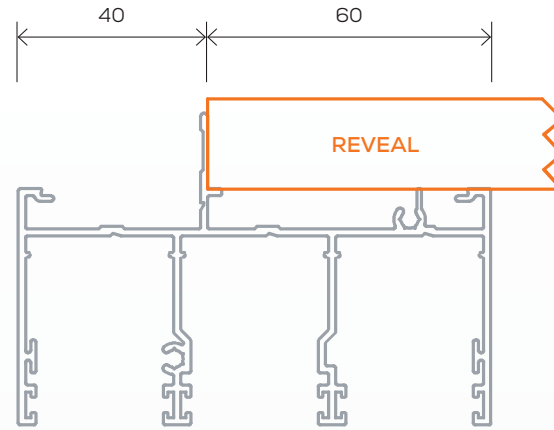

Signature Double Hung Window (100mm)


Signature Double Hung Window CB (100mm)

SILL REBATES

Note: Diagrams are not to scale

Essential Double Hung Window 52

2911 SILL

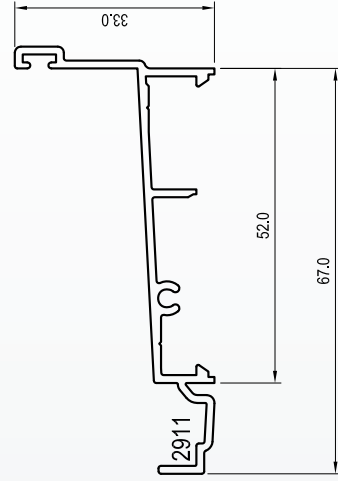

2911 SILL WITH 2925 SUBSILL '35' 52

